


# RE-2X(St)Yv-fl

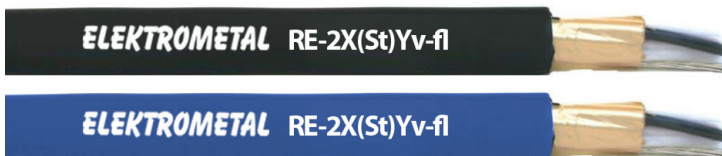

**Primena:**  
područjima, kao i za poleganje u zemlju.

**installation in dry and damp areas as well as in ground.**

<b>Materijal provodnika:</b>	bakar	<b>Conductor material:</b>	bare copper
<b>Konstrukcija provodnika:</b>	klasa 2, 7-žičana konstrukcija	<b>Conductor construction:</b>	class 2, 7-wired construction
<b>Izolacija:</b>	XLPE	<b>Insulation:</b>	XLPE
<b>Jedinica rasporeda:</b>	par	<b>Stranding unit:</b>	pair
<b>Raspored žila:</b>	parovi u slojevima	<b>Stranding:</b>	pairs in layers
<b>Ekran preko pramena:</b>	folija	<b>Screen over strand:</b>	foil
<b>Odvodna žica:</b>	da	<b>Drain wire:</b>	yes
<b>Materijal plašta:</b>	PVC	<b>Sheathing material:</b>	PVC
<b>Otpornost na plamen:</b>	VDE 0482-266-2-4/IEC 60332-3-24 (Kat. C)	<b>Flame retardant:</b>	VDE 0482-266-2-4/IEC 60332-3-24 (Kat. C)
<b>Maks.temperatura tokom rada:</b>	-20 - +70 °C	<b>Max. operating temperature, fixed:</b>	-20 - +70 °C
<b>Radius savijanja tokom rada:</b>	7,5 x DA	<b>Bending radius, fixed installation:</b>	7,5 x DA
<b>Otpornost izolacije:</b>	5000 MOhm <sub>x</sub> km	<b>Insulation resistance:</b>	5000 MOhm <sub>x</sub> km
<b>Specifična induktivnost:</b>	1 mH/km	<b>Specific inductivity:</b>	1 mH/km
<b>Radni kapacitet:</b>	120 nF/km	<b>Operating capacity:</b>	120 nF/km
<b>Nominalni naponski nivo U:</b>	300 V	<b>Nominal voltage U:</b>	300 V
<b>Ispitni naponski nivo:</b>	2 kV	<b>Test voltage:</b>	2 kV

**Dodatni podaci:**  
Raspored žila:  
- dva jezgra uvijena u parove (ili trojke)  
- parovi/ trojke upredene u slojevima  
- Identifikacija jezgra: crno-beli sa sekvencijalnom numeracijom

**Additional information:**  
Stranding:  
- two cores twisted into pairs (triples)  
- pairs/triples stranded in layers  
Core identification: black-white with sequential numbering

## RE-2X(St)Yv-fl

Naziv kabela	Presek	Boja	Da	T	CU	Naziv kabela	Presek	Boja	Da	T	CU
Cable name	Cross section	Color	mm	kg/km	kg/km	Cable name	Cross section	Color	mm	kg/km	kg/km
RE-2X(St)Yv-fl	08X2X0,5	plava / blue	13,3	210	85	RE-2X(St)Yv-fl	20X2X0,5	plava / blue		400	205
RE-2X(St)Yv-fl	12X2X0,5	plava / blue	15,4	266	130	RE-2X(St)Yv-fl	24X2X0,5	plava / blue	20,1	455	250
RE-2X(St)Yv-fl	16X2X0,5	plava / blue	17,2	340	165	RE-2X(St)Yv-fl	01X2X0,75	plava / blue	7,7	80	25

Naziv kablova	Presek	Boja	Da	T	CU	Naziv kablova	Presek	Boja	Da	T	CU
Cable name	Cross section	Color	mm	kg/km	kg/km	Cable name	Cross section	Color	mm	kg/km	kg/km
RE-2X(St)Yv-fl	02X2X0,75	plava / blue	10,4	101	47	RE-2X(St)Yv-fl	04X2X0,75	plava / blue	11,7	160	64
RE-2X(St)Yv-fl	06X2X0,75	plava / blue	13,6	220	94	RE-2X(St)Yv-fl	10X2X0,75	crna / black	15,6	320	156
RE-2X(St)Yv-fl	08X2X0,75	plava / blue	14,4	278	125	RE-2X(St)Yv-fl	12X2X0,75	crna / black	16,8	344	184
RE-2X(St)Yv-fl	10X2X0,75	plava / blue	15,6	320	156	RE-2X(St)Yv-fl	16X2X0,75	crna / black	18,8	430	245
RE-2X(St)Yv-fl	12X2X0,75	plava / blue	16,8	344	184	RE-2X(St)Yv-fl	20X2X0,75	crna / black	20,2	535	308
RE-2X(St)Yv-fl	16X2X0,75	plava / blue	18,8	430	245	RE-2X(St)Yv-fl	24X2X0,75	crna / black	22,1	610	370
RE-2X(St)Yv-fl	20X2X0,75	plava / blue	20,2	535	308	RE-2X(St)Yv-fl	01X2X1	crna / black	8,1	90	25
RE-2X(St)Yv-fl	24X2X0,75	plava / blue	22,1	610	370	RE-2X(St)Yv-fl	02X2X1	crna / black	11	145	46,2
RE-2X(St)Yv-fl	01X2X1	plava / blue	8,1	90	25	RE-2X(St)Yv-fl	04X2X1	crna / black	12,5	200	87,7
RE-2X(St)Yv-fl	01X2X1,3	plava / blue	8,4	102	34	RE-2X(St)Yv-fl	06X2X1	crna / black	14,6	276	133,1
RE-2X(St)Yv-fl	01X3X1,3	plava / blue	10	110	50	RE-2X(St)Yv-fl	08X2X1	crna / black	15,4	321	167,7
RE-2X(St)Yv-fl	02X2X1,3	plava / blue	11,6	125	60	RE-2X(St)Yv-fl	01X2X1,3	crna / black	8,4	102	34
RE-2X(St)Yv-fl	04X2X1,3	plava / blue	13,2	220	114	RE-2X(St)Yv-fl	01X3X1,3	crna / black	10	110	50
RE-2X(St)Yv-fl	06X2X1,3	plava / blue	15,5	300	173	RE-2X(St)Yv-fl	02X2X1,3	crna / black	11,6	125	60
RE-2X(St)Yv-fl	08X2X1,3	plava / blue	16,4	360	218	RE-2X(St)Yv-fl	04X2X1,3	crna / black	13,2	220	114
RE-2X(St)Yv-fl	12X2X1,3	plava / blue	19,2	488	322	RE-2X(St)Yv-fl	06X2X1,3	crna / black	15,5	300	173
RE-2X(St)Yv-fl	16X2X1,3	plava / blue	21,6	622	426	RE-2X(St)Yv-fl	08X2X1,3	crna / black	16,4	360	218
RE-2X(St)Yv-fl	20X2X1,3	plava / blue	27	850	525	RE-2X(St)Yv-fl	12X2X1,3	crna / black	19,2	488	322
RE-2X(St)Yv-fl	24X2X1,3	plava / blue	26,1	912	684	RE-2X(St)Yv-fl	16X2X1,3	crna / black	21,6	622	426
RE-2X(St)Yv-fl	04X2X0,5	crna / black	10,9	130	46	RE-2X(St)Yv-fl	20X2X1,3	crna / black	27	850	525
RE-2X(St)Yv-fl	08X2X0,5	crna / black	13,3	210	85	RE-2X(St)Yv-fl	24X2X1,3	crna / black	26,1	912	684
RE-2X(St)Yv-fl	12X2X0,5	crna / black	15,4	266	130	RE-2X(St)Yv-fl	01X3X1,5	crna / black	9,3	134	55
RE-2X(St)Yv-fl	16X2X0,5	crna / black	17,2	340	165	RE-2X(St)Yv-fl	02X2X1,5	crna / black	12,5	187	72,1
RE-2X(St)Yv-fl	24X2X0,5	crna / black	20,1	455	250	RE-2X(St)Yv-fl	04X3X1,5	crna / black	15,3	342	203,6
RE-2X(St)Yv-fl	01X2X0,75	crna / black	7,7	80	25	RE-2X(St)Yv-fl	10X2X1,5	crna / black	19,5	526	335,6
RE-2X(St)Yv-fl	04X2X0,75	crna / black	11,7	160	64	RE-2X(St)Yv-fl	14X2X1,5	crna / black	21,3	692	467,6
RE-2X(St)Yv-fl	06X2X0,75	crna / black	13,6	220	94	RE-2X(St)Yv-fl	36X2X1,5	crna / black		1627	1085
RE-2X(St)Yv-fl	08X2X0,75	crna / black	14,4	278	125						

**Objašnjenje oznaka**

**Da** Spoljni dijametar  
**T** Ukupna težina kablova  
**Cu** Težina bakra u kablovu

**Labels explanation**

**Da** Outer diameter  
**T** Total weight  
**Cu** Copper weight